

955 Benton Ave., Winslow, ME 04901 • Phone: 1-877-564-6697 • Fax: 1-800-738-6314
Email: service@johnnyseeds.com • Website: Johnnyseeds.com

The **Johnny's Rolling Dibbler Wheel** works with the following products:

- #6212 Johnny's Single-Row Rolling Dibbler
- #7775 Infinite Dibbler Frame – 24"
- #7776 Infinite Dibbler Frame – 32"
- #7777 Infinite Dibbler Frame – 36"
- #7778 Two-Person Infinite Dibbler Frame – 36"


Included Parts:

- A. (1) Rolling Dibbler Wheel
- B. (16) Dibbles
- C. (1) Clevis Pin

Required Parts

A compatible Infinite Dibbler Retrofit Axle (sold separately) is required for installation onto an Infinite Dibbler Frame.


Length	Dibbler Frame	Retrofit Axle
24"	#7775	#6198
32"	#7776	#6196
36"	#7777	#6195
36"	#7778	#6195

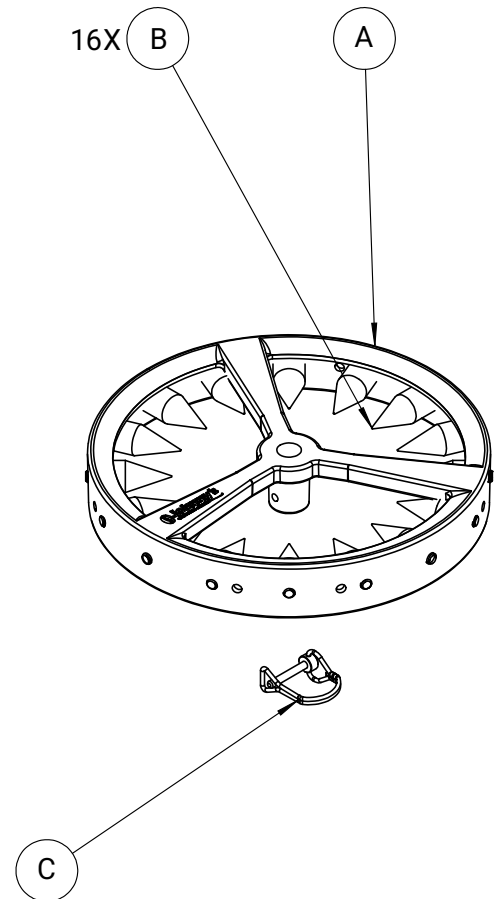

Installing Dibbles:

The Dibbles (B) are shipped in a stored position. To use, unthread them by hand from the inside of the Rolling Dibble Wheel (A) and reinstall them on the outside in the desired positions, marked with the numbers "3" and "4." Use the chart below to help guide your placement.

Spacing	Positions
3 inch	All holes marked "3"
4 inch	All holes marked "4"
6 inch	Every other "3"
9 inch	Every other "4"
12 inch	All holes marked both "3" & "4"
16 inch	All holes at a spoke
23 inch	Two dibbles on opposite sides
43 inch	One dibble anywhere

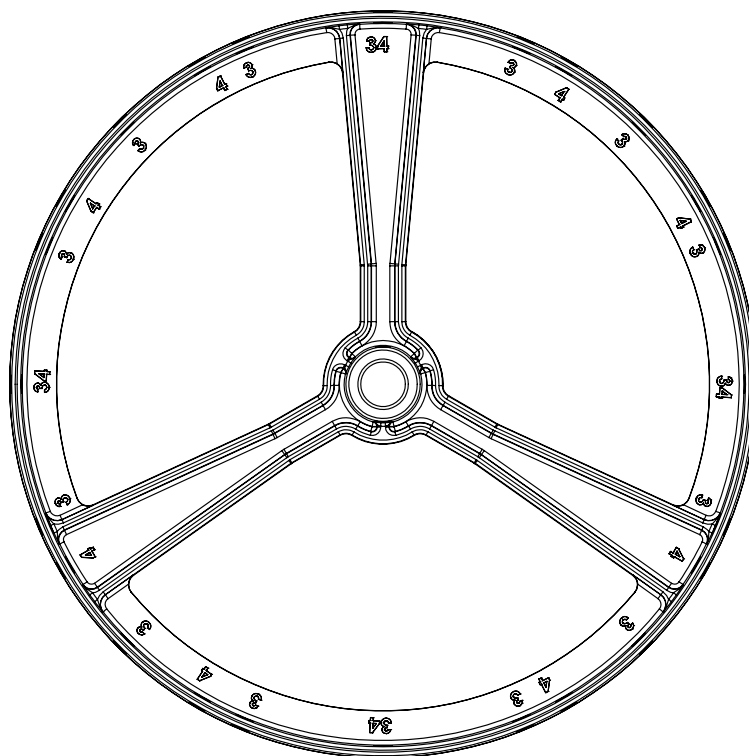

Assembly Onto Infinite Dibbler Frame:

1. Remove the axle from the frame by sliding the rubber rings off the axle support pins and removing the pins from the frame.



2. Attach **Johnny's Rolling Dibbler Wheel(s)** (A) in the desired location(s) along the Retrofit Axle (sold separately), using a Clevis Pin (C). Holes are spaced at 1" intervals.



3. Install the axle onto the frame using the same axle support pins. Move the rubber rings back onto the flat portion of the pin.



4. Once the axle is installed, the Rolling Dibbler Wheel(s) (A) can be moved along the axle. To add or remove wheels, repeat the installation process.



Important Note:

- The Retrofit Axles allow use of Johnny's Rolling Dibbler Wheels with your existing Two Bad Cats Infinite Dibbler. However, you cannot mix the Two Bad Cats wheels (no longer available) with the Johnny's Dibbler Wheels. Keep the original axle if you would like to swap between the wheel systems.

To Install Adjustable Toolbar Dibbles (Sold Separately):

For a larger variety of dibble sizes, the threads on the Rolling Dibbler Wheels #6199 are compatible with Adjustable Toolbar Dibbles (#6753, #6754, #6755, #6756, #6757).

1. Remove the included dibbles from Rolling Dibbler Wheel #6199.
2. From the inside of the wheel, thread a 3/8"-16 x 1" bolt (not included) through the hole(s) at the desired location(s).
3. Thread the dibble(s) onto the bolt(s).

