




955 Benton Ave., Winslow, ME 04901 • Phone: 1-877-564-6697 • Fax: 1-800-738-6314  
Email: [service@johnnyseeds.com](mailto:service@johnnyseeds.com) • Website: [Johnnyseeds.com](http://Johnnyseeds.com)

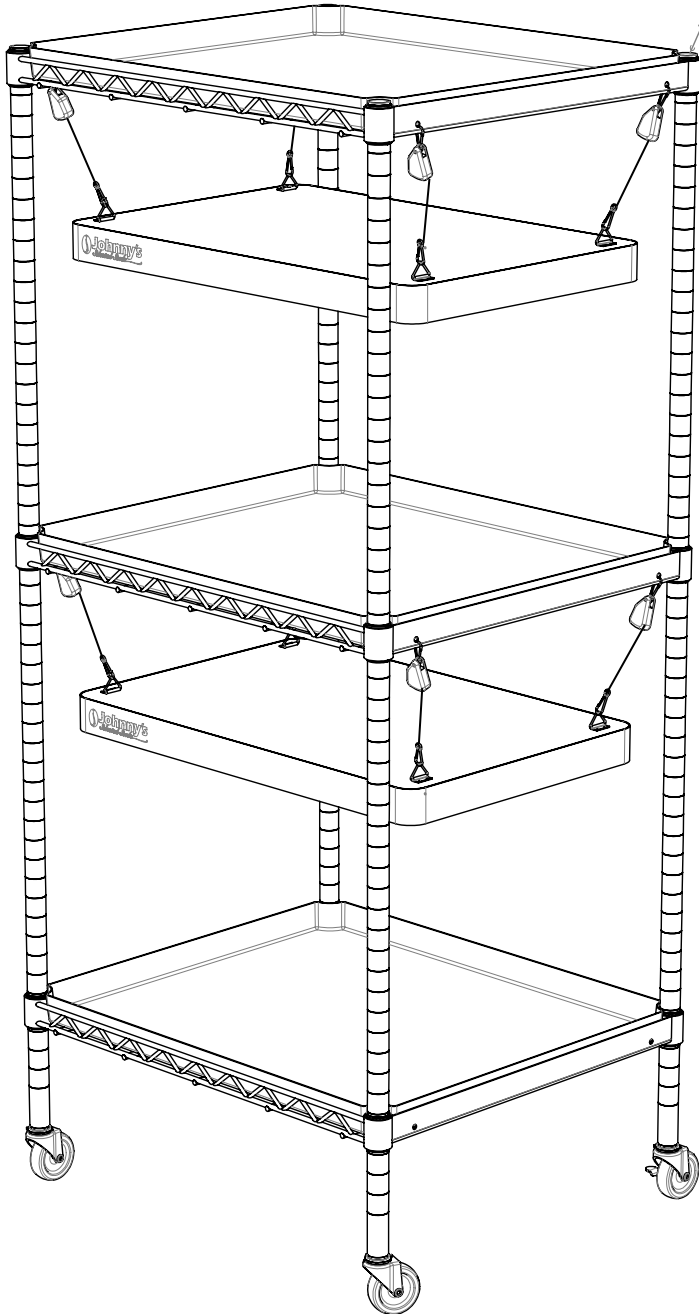

### Parts List:

- A. (4) Upper Support Leg (marked 25–48)
- B. (4) Lower Support Leg (marked 1–24)
- C. Castor Wheels: (2) Locking and (2) non-locking
- D. (12) Shelf Collar Sets (24 pieces)
- E. (3) Shelf
- F. (3) Shelf Liner
- G. (8) Light Support Cable
- H. (2) LED Light Housing

# Modular LED Light Cart

## No-Tools Assembly Instructions:

1. Attach the 2 Locking Caster Wheels (C) in a locked position and the 2 Non-Locking Castor Wheels to the Lower Support Legs (B). Screw assembled Lower Support Leg (B) to Upper Support Leg (A). Repeat this for each support leg.
2. Choose the height of the lowest shelf and attach Shelf Collars (D) to the assembled Support Legs. Reference numbers 1 to 48 have been added to Support Legs to ensure level mounting. Note direction indicator “TOP” on Shelf Collars. Thinner edge of Collars should point up. Collars will seat into grooves in Support Legs. There should be a thin gap between collar halves.
3. Slide shelf down assembled support legs and over 4 attached Shelf Collars (D). This will stabilize the light cart. Install shelves with sides facing up, above the shelf surface. Shelf Liners (F) will nest inside shelves.
4. Repeat this process for both the middle and top shelves, respectively.
5. Attach the Light Support Cables (G) to holes in the side walls of the shelves.
6. Clip the other end of the four Light Support Cables (G) to the four mounting points at the four corners of the LED Light Housing (H).
7. Raise the LED Light Housing (H) by pulling on the end of the Light Support cord. Ratchets in each of the Light Support Cables (G) will click as the LED Light Housing is adjusted up.
8. To lower the LED Light Housing (H) push the metal tab in each ratchet up. To control descent, be sure to secure the LED Light Housing as cable releases inside the ratchet.
9. Insert Shelf Liners (F) into each Shelf (E). This will shield LED Light Housings from water and debris.
10. Your Modular LED Light Cart is now fully assembled. Caster height, Shelf height and LED Light Housing height can be adjusted as needed.
11. Modular Light Cart Connectors (item #6342) can be used to link additional carts together for larger scale commercial use.
12. Maintenance – To maintain your Modular Light Cart, periodically wipe off light housings with a damp cloth and mild detergent. The plastic shelf liners can be rinsed and dried thoroughly as needed.