

955 Benton Ave., Winslow, ME 04901 • Phone: 1-877-564-6697 • Fax: 1-800-738-6314
Email: service@johnnyseeds.com • Website: Johnnyseeds.com

The Bender Hitch Mount is designed to fit into 2-inch tow-bar receivers, which are the most common. Adapters for smaller receivers can be purchased at local retailers. It doubles as the surface for bending your hoops and allows for easily transporting your materials in the bed of your vehicle to your construction site. The Bender Hitch Mount is compatible with 4- and 6-foot Quick Hoops Low Tunnel Benders (#9377 and #9520). For use with galvanized electrical conduit (EMT) only.

Materials Included:

- ☐ Hinged support arm assembly
- ☐ Wire-lock clevis pin
- ☐ Aluminum mounting plate
- ☐ (4) 5/16"-18 x 1" screws and hex nuts


Additional Materials Needed:

- ☐ (2) ½" wrenches
- ☐ 7/16" wrench
- ☐ Standard hitch pin
- ☐ 2" tow-bar receiver on a vehicle


Assembly Instructions:

STEP 1: Remove wire-lock clevis pin from green hinged portion of mount, rotate support arms so they are at right-angles to each other, and secure with wire-lock clevis pin.

STEP 3: Place the aluminum mounting plate on top of the hitch mount with the printed arrow facing up and toward the vehicle.

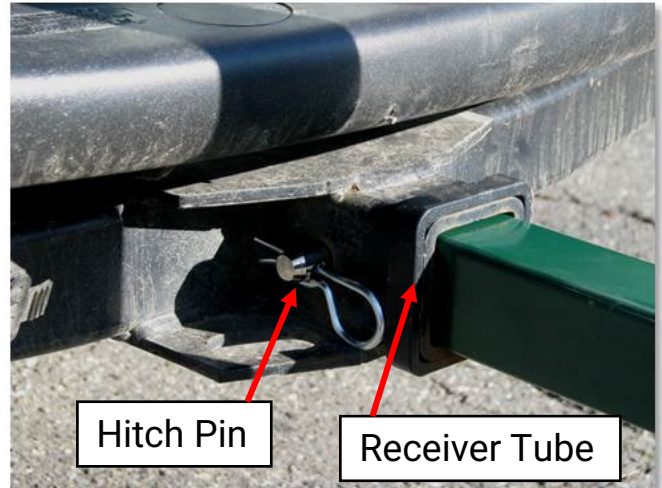

STEP 2: Slide the end with the large predrilled hole into the receiver tube on your vehicle. Secure with any standard hitch pin or large bolt.

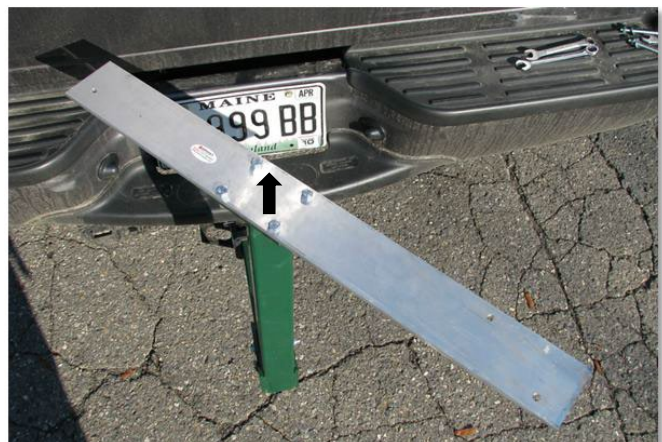



STEP 4: Using the two ½" wrenches, secure the mounting plate with the 4 screws and hex nuts provided as shown above.



STEP 5: Use the single hole nearest the vehicle for either bender; and one of the other holes on the opposite end depending on which bender you have.



STEP 6: Using a 7/16" wrench, secure the bender using the two ¼" x 4-½" carriage bolts, nuts, and washers included with the bender.



NOTE: All washers should be located below the plate and above the hex nuts as shown above.

