

#6248 Johnny's Commercial LED 8-Tray Light Cart

Assembly & Use



955 Benton Ave., Winslow, ME 04901 • Phone: 1-877-564-6697 • Fax: 1-800-738-6314 Email: service@johnnyseeds.com • Website: Johnnyseeds.com

Parts List:

FRAME RAILS

- □ A1 (2) U-Frame
- ☐ A2 (4) Long Frame Rail
- ☐ A3 (2) Short Frame Rail Bottom
- ☐ A4 (1) Long Frame Rail Top



- ☐ B1 (2) T-Clamp Assembly Top
- ☐ B2 (12) T-Clamp
- B3 (12) M6 Cap Screw
- ☐ B4 (12) M6 Standard Nut
- ☐ B5 (4) M6 6x2.25" Cap Screw
- ☐ B6 (12) M6 Lock Nut

LIGHT FIXTURE COMPONENTS


- ☐ C1 (1) LED Light Fixture with 3.5' Cord
- ☐ C2 (1) LED Light Fixture with 6.5' Cord
- ☐ C3 (2) Top Dome Lock Washer Set
- ☐ C4 (4) Dome Lock Washer Set
- ☐ C5 (4) 3/8" Light Fixture Support Bolt
- □ C6 (8) 3/8" Nut
- ☐ C7 (4) Light Support Rod
- ☐ C8 (4) Light Fixture Hand Knob
- ☐ C9 (8) LED Tube, 3' T8 PLT Single-Ended
- ☐ C10 (8) 3/8" Washer

ADDITIONAL COMPONENTS

- □ D1 (1) Power Strip 6 Outlet
- □ D2 (2) 36" Aluminum Shelf
- □ D3 (2) 3" Caster
- □ D4 (2) 3" Locking Caster

INCLUDED TOOLS

- ☐ T1 (1) Shelf Height Guide
- ☐ T2 (1) 5mm Hex Key
- ☐ T3 (1) 10mm Socket
- ☐ T4 (1) Socket Wrench

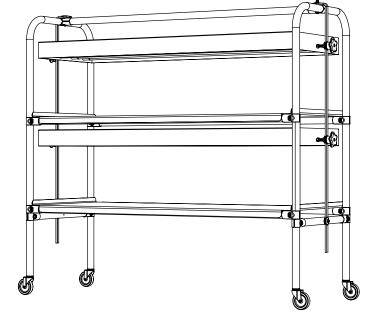

- 1. Please verify that all parts listed on Parts List have been included within the contents of all four product cartons. If any items are missing, please contact Johnny's Customer Service at 1-877-564-6697.
 - **Note:** We recommend that two people assemble this Commercial Light Cart.
- 2. Position two **U-Frames (A1)** on their side and spaced about 4 feet apart. Install the **Long Frame Rail-Top (A4)** onto **U-Frames (A1)** at the top center position of U-Frames using **T-Clamp Assembly-Top (B1)** (x2). The corrugated carton may be used as a work surface area to protect metal parts from scratching during assembly. See FIG. 1.
- 3. Tighten T-Clamp Assembly-Top (B1) (x2) into place using M6 6x2.25" Cap Screws (B5) (x2), Top Dome Lock Washer Set (C3) (x2) and M6 Lock Nuts (B6) (x2) which have been pre- assembled to the T-Clamp Assembly-Top.
 SEE FIG.1 for orientation. Note: Light Support Rods (C7) will be added in a later
- 4. Slide assembled **T-Clamps (B2)** (x8) onto **U-Frames (A1)**. Spacing between each mounted **T-Clamp** is 15". A **Shelf Height Guide (T1)** has been included to simplify installation. (Clearance of the bottom **T-Clamp** should be 3".) SEE FIG.2.

RAIL INSTALLATION

step.

- 5. Insert Long Frame Rails (A2) (x4) into open ends of the T-Clamps (B2). Fully tighten (final torque) T-Clamps with M6 Lock-Nuts (B6) (x8). Discard (16) M6 Std Nuts (B4). See FIG.3.
- 6. Install **Short Frame Rails Bottom (A3)** (x2) onto lower portion of **U-Frames (A1)** (x2) using **T-Clamps (B2)** (x4), **M6 Cap Screws (B3)** (x4), **M6 Lock-Nuts (B6)** (x4). T-Clamps and Short Frame Rails should be below bottom Long Frame Rails. See FIG 3.
- 7. Rotate **Light Cart Frame** upright.

LIGHT SUPPORT ROD INSTALLATION

- 8. Attach Light Support Rods (C7) (x4) to the top side of Long Frame Rail Top (A4) ends using previously installed Top Dome Lock Washer Set (C3) (x2) to capture both Light Support Rod ends. Loosen M6 6x2.25" Cap Screws (B5) (x2) to create space between Dome Washers and top Flat Washers. Insert Light Support Rods (C7) into gaps. Then re-tighten M6 6x2.25" Cap Screws (B5) (x2). See FIG.4.
- 9. Secure bottom lengths of **Light Support Rods (C7)** using **Dome Lock Washer Sets (C4)** (x2), **M6 6x2.25" Cap Screws (B5)** (x2), **M6 Lock-Nuts (B6)** (x2), and center holes of **Short Frame Rails Bottom (A3)**. See FIG.5.

LED LIGHT HOUSING INSTALLATION

- 10. Unpack LED Light Fixture with 3.5' Cord (C1) and LED Light Fixture with 6.5' Cord (C2) and LED Bulbs (C9) (x8).
- 11. Install 3/8" Light Fixture Support Bolts (C5) (x4), 3/8" washers (C10) (x8) and 3/8" Nuts (C6) (x4) onto each side of LED Light Fixtures (C1 & C2) and tighten against the light fixtures.
- 12. Install a second set of 3/8" Nuts (C6) (x4) onto each 3/8" Light Fixture Support Bolts (C5) only threading them on about halfway. See FIG. 6.
- 13. Attach each **LED Light Fixture** (with installed Support Bolts and Nuts) onto Light Support Rods using **Dome Lock Washer Sets (C4)** (x4) and **Light Fixture Hand Knobs (C8)** (x4). Adjust **3/8" Nuts (C6)** installed in the previous step such that neither the light fixtures nor the support rods bend excessively. Tighten **Knobs** against these nuts to secure Light Fixture ends onto Light Support Rods. See FIG. 7.

The Light Fixture with the <u>6.5' cord</u> should be at the *top* of the U-Frame. The Light Fixture with the 3.5' cord should be at the *bottom* of the U-Frame.

Note:

Make sure both Light Fixture Power Cords come out on the same side of light cart when LED Light Fixtures are installed. Install **LED Bulbs (C9)** (x8) into all LED Light Fixtures.

- 12. Plug **LED Light Fixtures (C1 & C2)** into **Power Strip (D1)** to verify that all 8 LED Bulbs light.
- 13. Adjust height of **LED Light Fixtures (C1 & C2)** by slightly un-tightening hand knobs at one end of light fixture, then slide light fixture end up or down on Light Support Rods. Tighten hand knobs when desired position is found. Repeat adjustment of opposite side of light fixture.
- 14. Install **Shelf-Trays (D2)** (x2) onto Long Frame Rails.
- 15. Install Casters (D3) and Locking Castors (D4) into base of Light Cart Frame.

<u>MAINTENANCE</u>

Unplug Commercial LED Light Cart Power Strip before cleaning. LED Light Fixtures should not require maintenance. Periodically wipe down LED Light Fixtures with a damp cloth and mild liquid detergent or glass cleaner. Do not attempt to repair or modify the Light Fixtures.

Please contact Johnny's at 1-877-564-6697 for troubleshooting assistance.



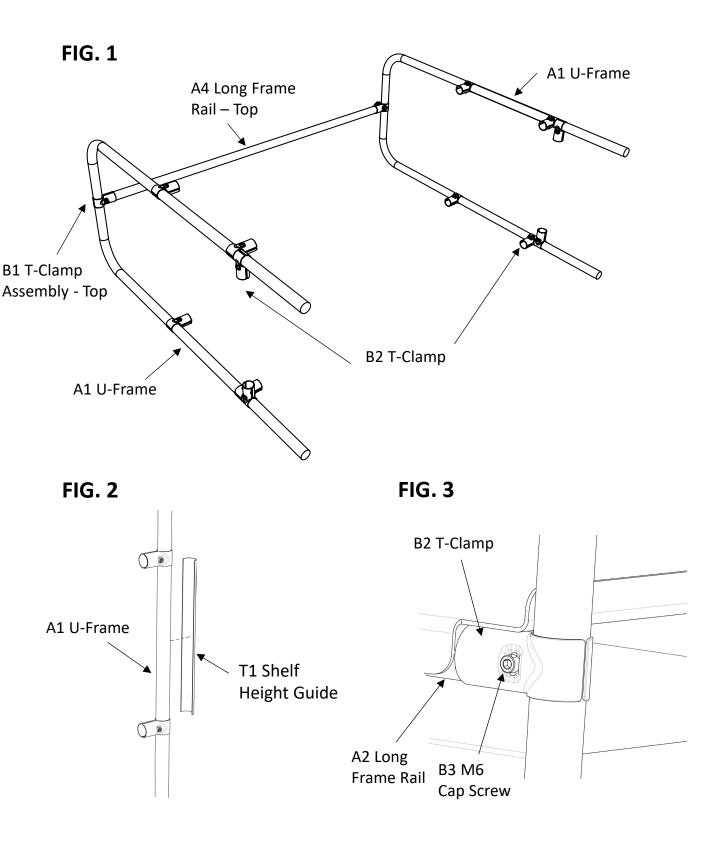


FIG. 4 FIG. 5

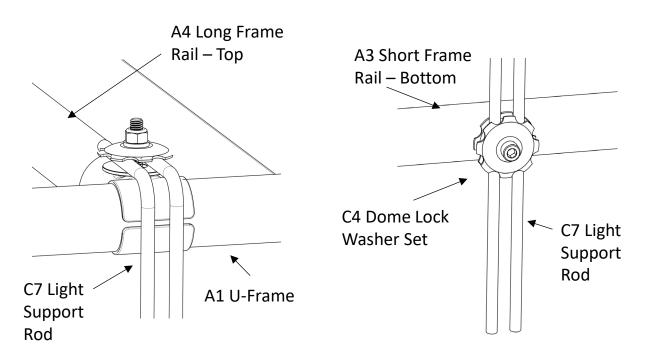

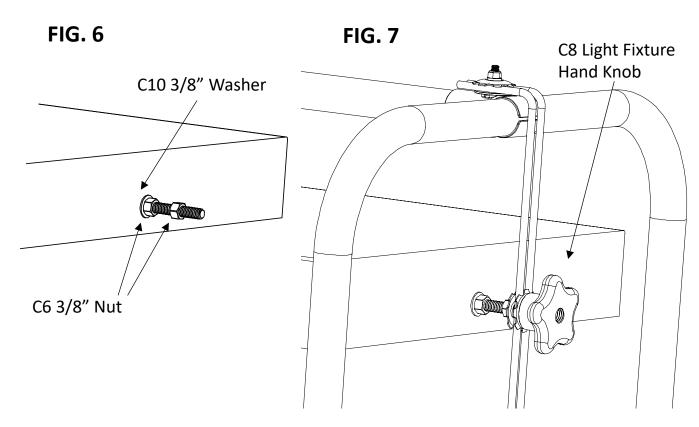

Copyright © 2025 Johnny's Selected Seeds. All rights reserved.