

955 Benton Ave., Winslow, ME 04901 • Phone: 1-877-564-6697 • Fax: 1-800-738-6314  
 Email: service@johnnyseeds.com • Web Site: Johnnyseeds.com

**Components:**


- A – Handles
- B – Strap and strap bolt
- C – Strapped shaft
- D – Depth control stop plate
- E – Shaft bolts
- F – Bottom assembly
- G – Seedling chute
- H – Handle bolt
- I – Pivot shaft
- J – Hinge bolts
- K – Hinge flap
- L – Flap stop bolt\*

**Tools needed:**

- 1/2" Wrench
- Adjustable wrench
- Phillips Screwdriver (large head preferred)

**Cautions:**

- Operator should wear steel toed shoes, especially if edges are sharpened for use through thicker mulch covers.
- Tools should be kept away from children. Sharp edges and pinch points. Please be careful.

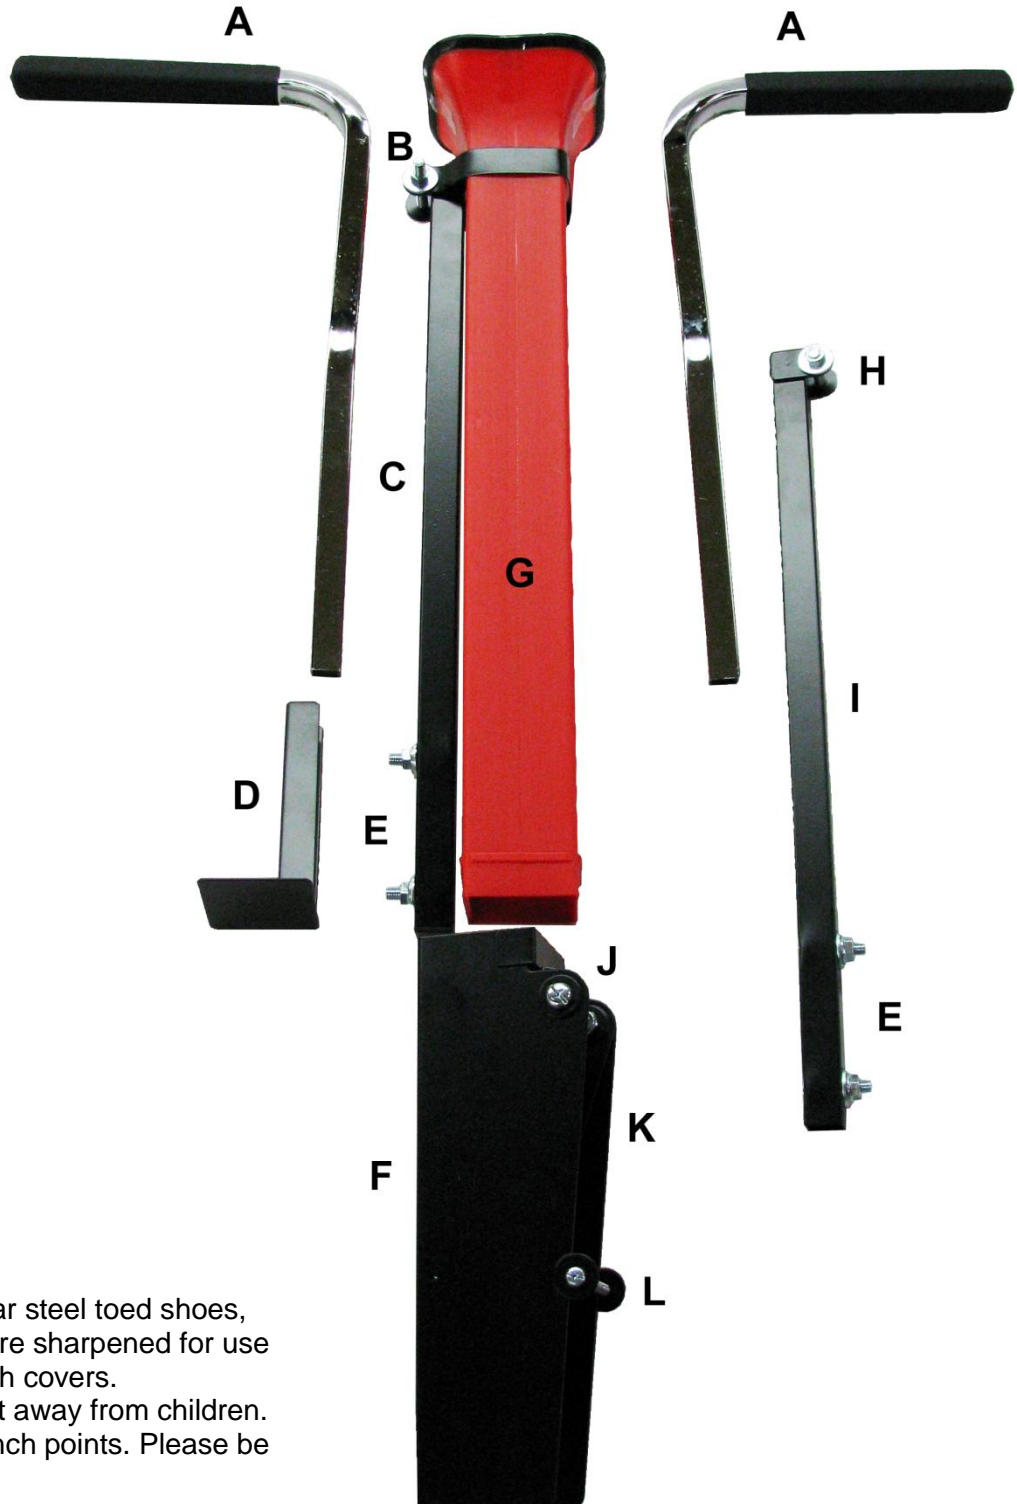

## Assembly:


### Step 1:

Remove hinge bolts (J) from the bottom assembly (F).

### Step 2:

Attach strapped shaft (C) and depth control stop plate (D) to outside of bottom assembly (F) with two shaft bolts (E). Nuts should face out.

Note: Depth control stop plate is adjusted for desired planting depth by sliding up & down along the bottom shaft bolt.

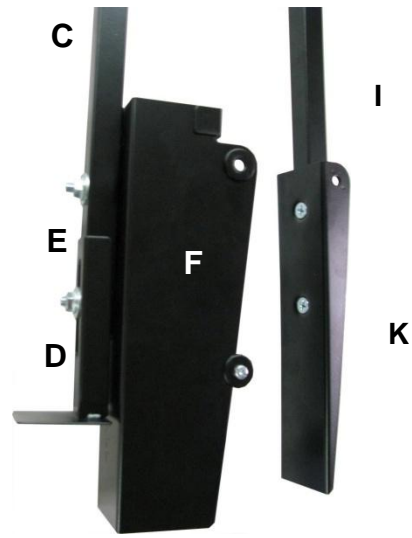


### Step 3:

Re-attach hinge flap (K) to bottom assembly (F) using the hinge bolts (J) removed in step one. Do not tighten completely. Pivot shaft (I) and hinge flap should move smoothly on hinge bolts.



### Step 4:

Insert handles (A) into their respective shafts (C & I) and slide seedling chute (G) into bottom assembly (F). Adjust handles (A) as desired for height and tighten strap bolt (B) and handle bolt (H) to complete assembly.

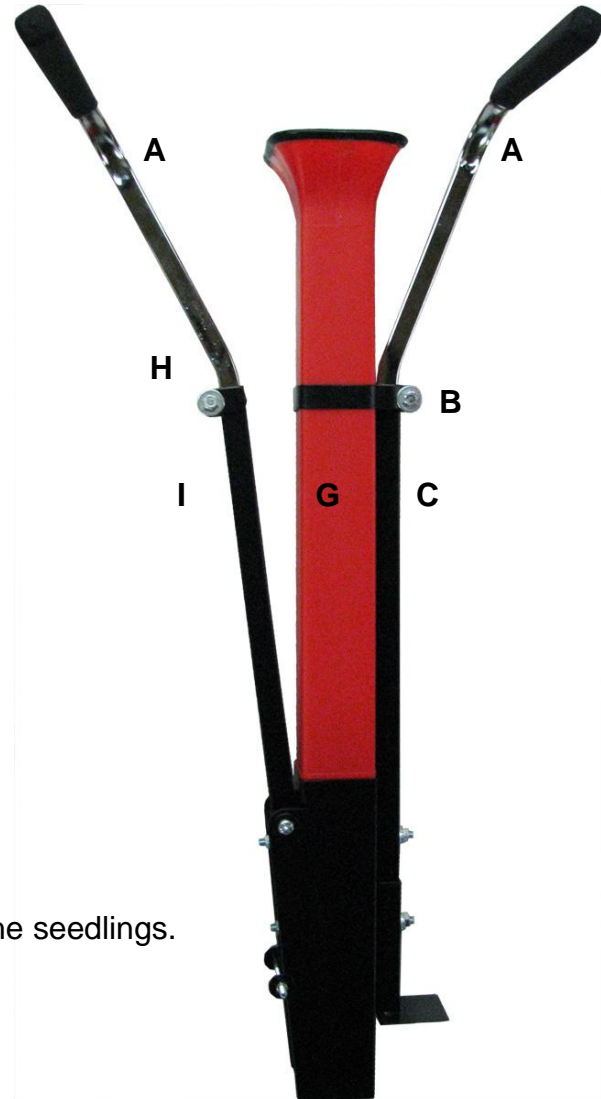

## Operation:

- One person operates the transplanter, another handles the seedlings.
- Hold handles apart.
- Plunge into soil to the depth stop.
- Push handles together.
- Drop transplant into the seedling chute.
- Lift the transplanter straight up.
- Firm soil around the seedling with a foot.
- Follow up with some water and you are done.

Made in Taiwan  
Patent #6,659,028 B1

REV 01/28/2016 RP, rc

Copyright © 2016 Johnny's Selected Seeds. All rights reserved.